




Aeronautic
Defense

H-PAC is a brand new connector for Power applications. This product features an innovative and easy-to-use locking system offering a perfect connection security : a lever mating mechanism and a CPA (Connector Position Assurance).

This quick-mate and quick-install connector aims to facilitate operator's work for both installation and maintenance and is perfectly suited for high demanding power applications on various platforms such as eVTOLS, UAVs,...

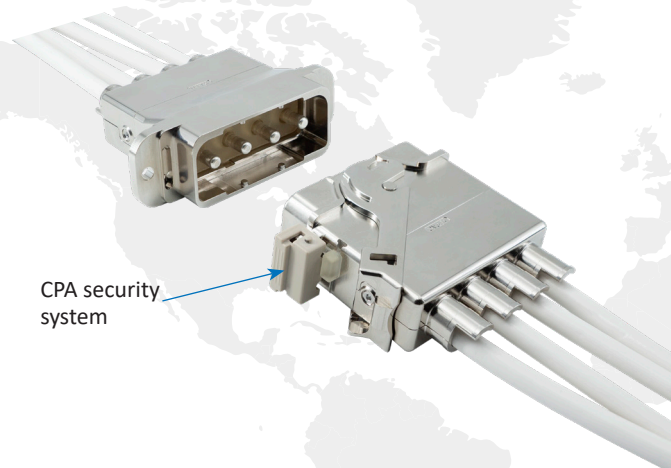

CPA security system


Key features

- According to MIL-DTL-38999 specifications
- 360° Shielding
- Temperature: -65°C to +200°C
- Overmolding technology for HVDC application
- HVIL technology (High Voltage Interlock Loop)
- Quick connection / Lever lock assistance
- CPA function (Connector Position Assurance)
- High mechanical conception: metallic shape
- Quick install accessories

Test voltage for mated H-PAC (V AC peak)

Altitude	Breakdown voltage (BV) differential (ct/ct)	DWV recommended (3/4 BV) differential (ct/ct)	PDIV (5pF) differential (ct/ct)
Sea level	11300	8450	7700
30 000 ft	3579	2600	3310
45 000 ft	2631	1900	2290
69 000 ft	1727	1200	1440

Density

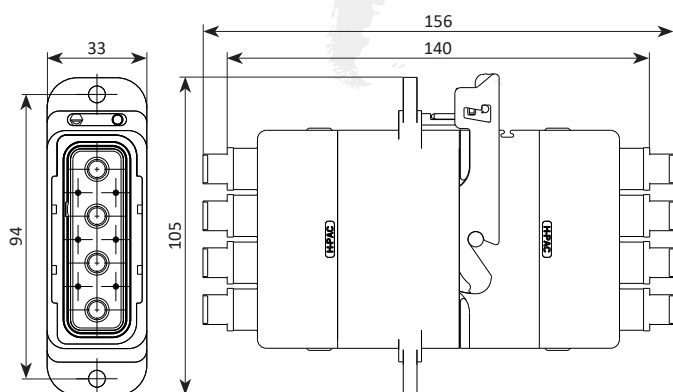

- Plug + accessory weight (without contacts): 155 g
- Receptacle + accessory weight (without contacts): 170 g

Shocks & Vibrations (RTCA DO 160 G sec7 & sec8 cat R)

- Shocks: Operational 6g / 11ms and Crash safety (Impulse) 20g / 11ms
- Random vibrations: Level E & E1

Your partner for high performance connectors and attachment systems






Aeronautic
Defense

Polarizers

Each plug / socket can contain 2 polarizers.
Each polarizer can be put in 6 different positions which offers a total of 36 mechanical keying combinations.

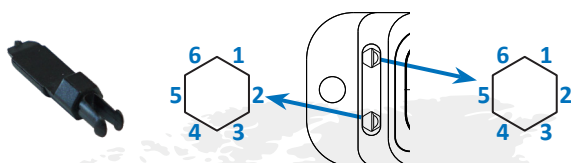


Accessories



The accessories are composed of two half parts and two captive screws.

Use an hexagonal key .078 inch across flats to fix them.

2 versions are available:
4 or 3 chimneys.

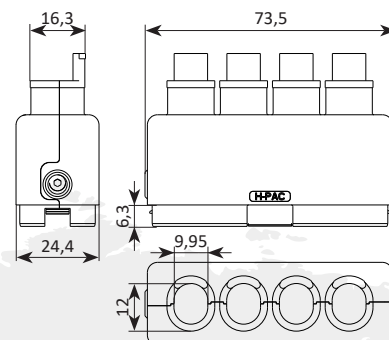

Contacts arrangements

Insert arrangement	04-04		03-00	
Contact gauge	#4	#22	#0	#22
Pin	AS39029/29-215 (80A)	AS39029/58-360	AS39029/29-216 (150A)	AS39029/58-360
	HV AALB (125A)	EN3155-008M2222	HV AALB (240A)	EN3155-008M2222
Socket	AS39029/30-221 (80A)	AS39029/56-348	AS39029/30-222 (150A)	AS39029/56-348
	HV AALB (125A)		HV AALB (240A)	
Number of contacts	4	6	3	4

Aluminum cable compatible.

Part numbering system

MATERIAL
Metallic

SHELL TYPE
Plug
Standard receptacle


PLATING
Bright nickel (RoHS)

PERIPHERAL SEALING OF THE MODULE
Sealed
Not sealed

MODULE LAYOUT
4 contacts size 4⁽¹⁾
3 contacts size 0⁽¹⁾

MODULE TYPE
Pin
Socket

Equipment code to be specified to get a shell equipped with a module

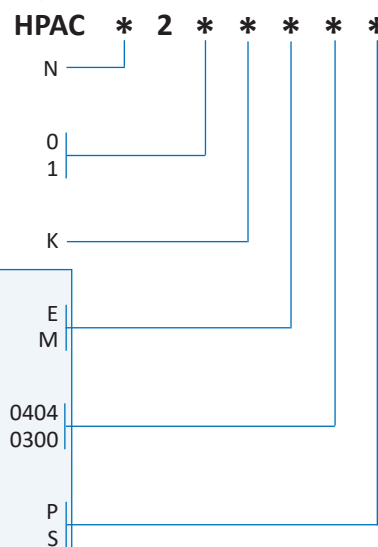

⁽¹⁾ Contacts must be ordered separately.